


High pressure foam dispenser station from 100 to 200 Bar



Foam
System
1

16.5

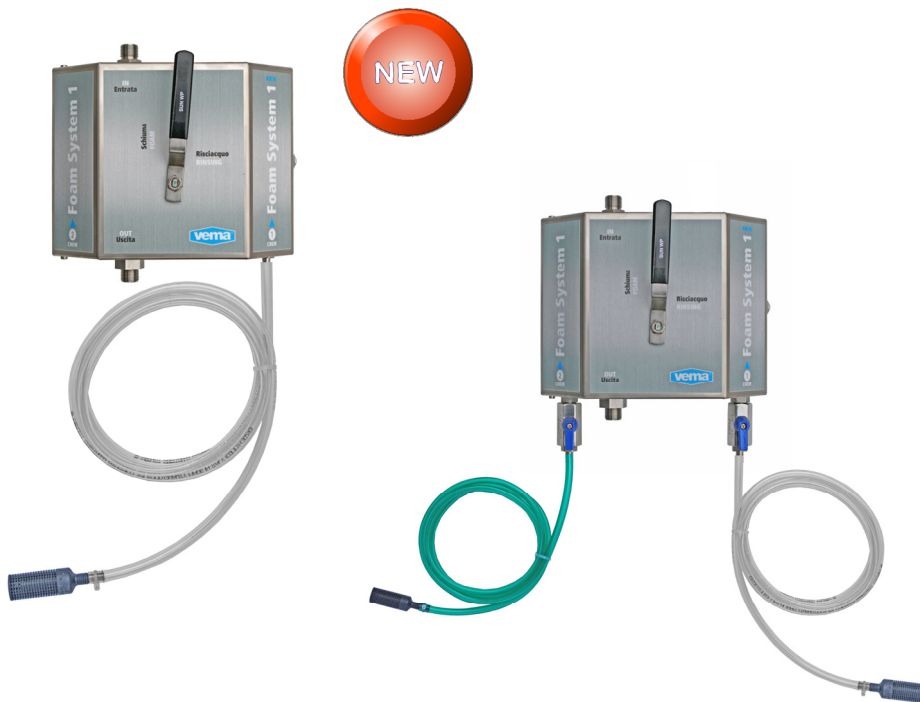

Double Suction

TECHNICAL DETAILS

Foam System 1 is a small high pressure foam dispenser .

Suitable for all high pressure washing machines (200 bars max).

Combined with the foam lance, it is extremely economical, with minimal use of detergent .

- ✓ Water flow : From ~11 l/min to ~ 15 l/min with pressure of from 80 to 150 bars (mean value)
- ✓ Working pressure : From 100 to 200 bars max
- ✓ Working temperature: 95 °C Max
- ✓ Dimensions: 225 x 175x 105 mm (L x H x P)
- ✓ Weight box : 4 Kg
- ✓ Material box : Stainless steel AISI/304
- ✓ Venturi system : Stainless steel AISI/316
- ✓ Product aspirated : From 0,1 % to 10 %
- ✓ Surface treated : About 70 m² for minute



Double Suction

| Ø Foro inc Ø Size inc | Ø Foro mm Ø Size mm | Img | Colore Color |
|--------------------------|------------------------|-----|----------------------|
| No Hole | Non forato | | Trasparente Clear |
| 0,01 | 0,25400 | | Rosa Pink |
| 0,014 | 0,35560 | | Porpora Purple |
| 0,018 | 0,45720 | | Azzurro Aqua |
| 0,02 | 0,50800 | | Giallo Yellow |
| 0,023 | 0,58420 | | Marrone Brown |
| 0,025 | 0,63500 | | Arancione Orange |
| 0,028 | 0,71120 | | Verde Green |
| 0,035 | 0,88900 | | Bronzo Tan |
| 0,04 | 1,01600 | | Blu Blue |
| 0,043 | 1,09220 | | Bianco White |
| 0,052 | 1,32080 | | Rosso Red |

Foam System 1

16.5



STANDARD ACCESSORIES

- ✓ Couple of quick couplings (Available without quick couplings)
- ✓ S/s special Aisi/316 fitting for microperforated inserts
- ✓ N. 01 Microperforated and colorful inserts kit to determinate the percentage of product aspirated
- ✓ N. 01/02 Detergent suction hose L=1,5 mt complete of filter

OPTIONAL ACCESSORIES



S/s foam lance cm 50 with nozzle and pin Ø14
Code 11150 (Section 55)



S/s rotating fitting 3/8" M/F
Code 12173 (Section 58)



H.p. gun with coupling Ø 14
Code 25095/ST (Section 56)

AVAILABLE CONFIGURATION

| CODE | WORKING PRESSURE (Bar) | IN-LET COUPLING | OUT-LET COUPLING | PERCENTAGE OF ASPIRED PRODUCT (%) | WEIGHT (Kg) | DIMENSIONS LxHxD (mm) | MAX TEMPERATURE IN-LET |
|---|------------------------|-----------------|------------------|-----------------------------------|-------------|-----------------------|------------------------|
| 15745 | 100 ~ 200 | - | - | 0,1 ~ 10 | 4 | 225x175x105 | 95 °C |
| 15746 | 100 ~ 200 | S/s male | S/s Female | 0,1 ~ 10 | 4 | 225x175x105 | 95 °C |
| DOUBLE SUCTION VERSION - SINGLE INJECTOR | | | | | | | |
| 15745/2 | 100 ~ 200 | - | - | 0,1 ~ 10 | 4 | 225x175x105 | 95 °C |
| 15746/2 | 100 ~ 200 | S/s male | S/s Female | 0,1 ~ 10 | 4 | 225x175x105 | 95 °C |